1/7 R. Barrese, et al. (JRS) END920000071US1


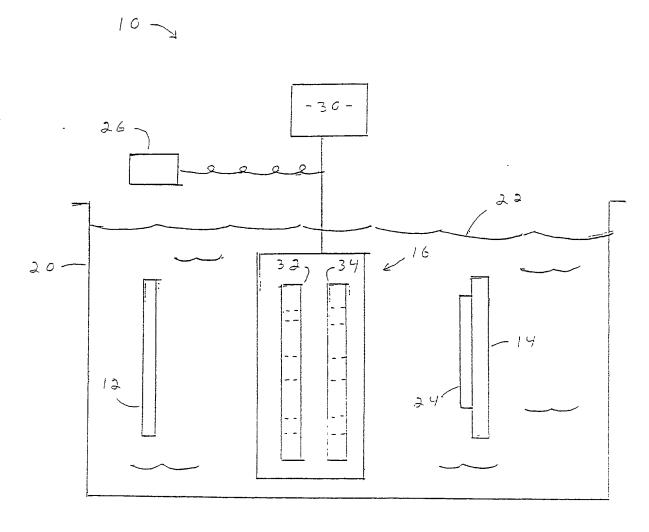


Fig. 1

2/7 END920000071US1

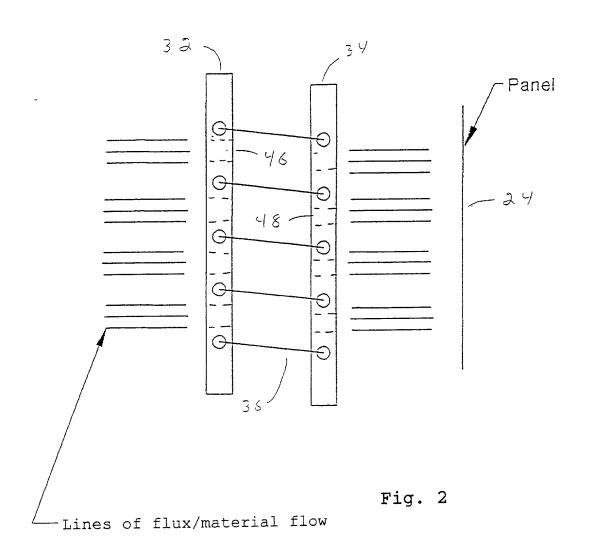

3/7 END920000071US1



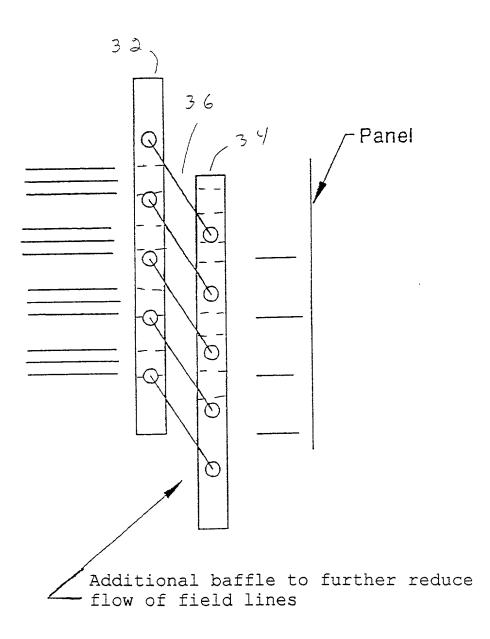


Fig. 3


4/7 END920000071US1

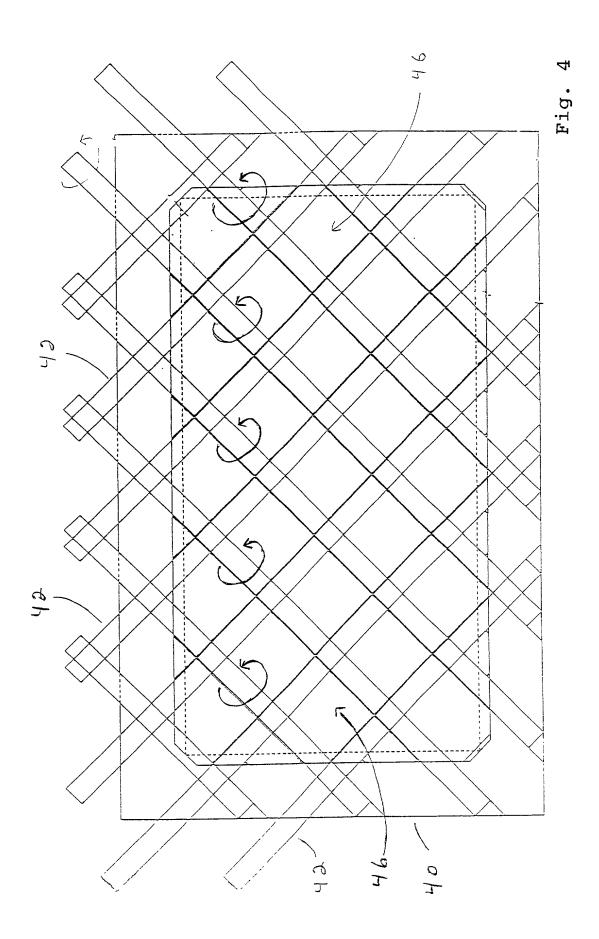

Top View Cutaway

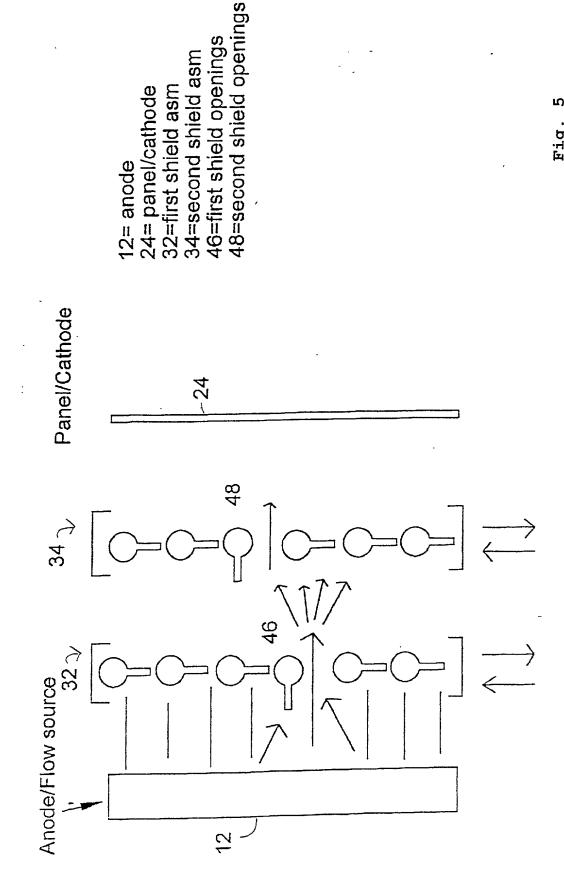

allows for less corner buildup Plating field lines diverted A- Area to be plated Anode

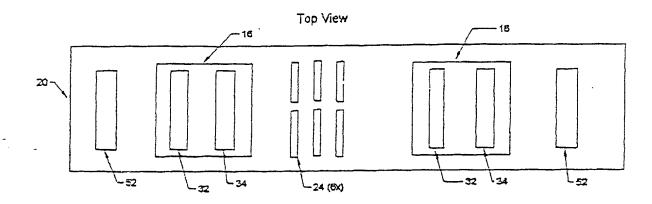

from made made the from the first flags

Fig. 7

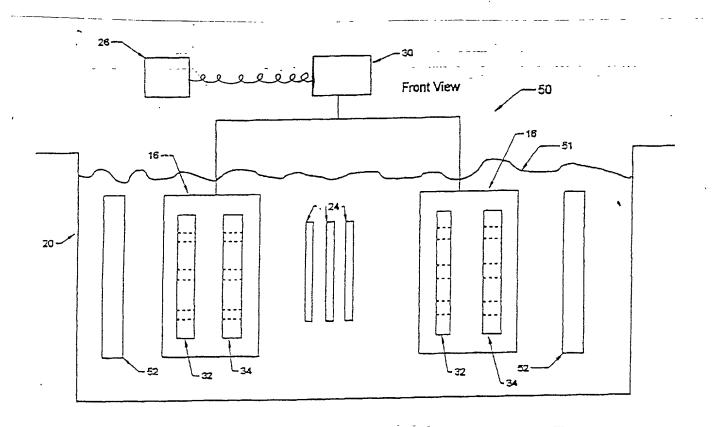


Fig. 8